

**§ 73.190**

**47 CFR Ch. I (10-1-96 Edition)**

field which would be obtained from a perfect antenna of the height specified by Figure 7 of §73.190 for operation on frequencies below 750 kHz.

[28 FR 13574, Dec. 14, 1963, as amended at 31 FR 8069, June 8, 1966; 33 FR 15420, Oct. 17, 1968; 44 FR 36038, June 20, 1979; 50 FR 18844, May 2, 1985; 51 FR 2707, Jan. 21, 1986; 51 FR 4753, Feb. 7, 1986; 52 FR 10570, Apr. 2, 1987; 56 FR 64868, Dec. 12, 1991]

**§ 73.190 Engineering charts and related formulas.**

(a) This section consists of the following Figures: 2, r3, 5, 6a, 7, 8, 9, 10, 11, 12, and 13. Additionally, formulas that are directly related to graphs are included.

(b) Formula 1 is used for calculation of 50% skywave field strength values.

FORMULA 1. Skywave field strength, 50% of the time (at SS+6):

The skywave field strength,  $F_c(50)$ , for a characteristic field strength of 100 mV/m at 1 km is given by:

$$F_c(50) = (97.5 - 20 \log D) - (2\pi + 4.95 \tan^2 \phi_M) \sqrt{\left(\frac{D}{1000}\right)} \quad dB(\mu V/m) \quad (\text{Eq. 1})$$

The slant distance,  $D$ , is given by:

$$D = \sqrt{40,000 + d^2} \quad km \quad (\text{Eq. 2})$$

The geomagnetic latitude of the midpoint of the path,  $\Phi_M$ , is given by:

$$\begin{aligned} \Phi_M &= \arcsin[\sin a_T \sin 78.5^\circ \\ &+ \cos a_T \cos 78.5^\circ \cos(69 + b_M)] \end{aligned}$$

degrees (Eq. 3)

The short great-circle path distance,  $d$ , is given by:

$$d = 111.18 d^\circ \quad km \quad (\text{Eq. 4})$$

Where:

$$\begin{aligned} d^\circ &= \arccos[\sin a_T \sin a_R \\ &+ \cos a_T \cos a_R \cos(b_R - b_T)] \end{aligned}$$

degrees (Eq. 5)

Where:

$a_T$  is the geographic latitude of the transmitting terminal (degrees)

$a_R$  is the geographic latitude of the receiving terminal (degrees)

$b_T$  is the geographic longitude of the transmitting terminal (degrees)

$b_R$  is the geographic longitude of the receiving terminal (degrees)

$a_M$  is the geographic latitude of the midpoint of the great-circle path (degrees) and is given by:

$b_M$  is the geographic longitude of the midpoint of the great-circle path (degrees) and is given by:

$$a_M = 90 - \arccos \left[ \sin a_R \cos \left( \frac{d^\circ}{2} \right) + \cos a_R \sin \left( \frac{d^\circ}{2} \right) \left( \frac{\sin a_T - \sin a_R \cos d^\circ}{\cos a_R \sin d^\circ} \right) \right] \quad (\text{Eq. 6})$$

$$b_M = b_R + k \left[ \arccos \left( \frac{\cos \left( \frac{d^\circ}{2} \right) - \sin a_R \sin a_M}{\cos a_R \cos a_M} \right) \right] \quad (\text{Eq. 7})$$

Note (1): If  $|\Phi_M|$  is greater than 60 degrees, equation (1) is evaluated for  $|\Phi_M| = 60$  degrees.

Note (2): North and east are considered positive; south and west negative.

**Federal Communications Commission****§ 73.190**

Note (3): In equation (7),  $k = -1$  for west to east paths (i.e.,  $b_R > b_T$ ), otherwise  $k = 1$ .

(c) Formula 2 is used for calculation of 10% skywave field strength values.

FORMULA 2. Skywave field strength, 10% of the time (at SS+6):

The skywave field strength,  $F_c(10)$ , is given by:

$$F_c(10) = F_c(50) + \Delta \quad \text{dB}(\mu\text{V/m})$$

Where:

$$\Delta = 6 \text{ when } |\Phi_M| < 40$$

$$\Delta = 0.2 |\Phi_M| - 2 \text{ when } 40 \leq |\Phi_M| \leq 60$$

$$\Delta = 10 \text{ when } |\Phi_M| > 60$$

**§ 73.190**

**47 CFR Ch. I (10-1-96 Edition)**

(d) Figure 6a depicts angles of departure versus transmission range. These angles may also be computed using the following formulas:

$$\theta^\circ = \tan^{-1} \left( k_n \cot \frac{d}{444.54} \right) - \frac{d}{444.54}$$

Where:

d=distance in kilometers  
n=1 for 50% field strength values  
n=2 or 3 for 10% field strength values  
and where  
 $K_1=0.00752$   
 $K_2=0.00938$   
 $K_3=0.00565$

NOTE: Computations using these formulas should not be carried beyond 0.1 degree.

(e) In the event of disagreement between computed values using the formulas shown above and values obtained directly from the figures, the computed values will control.

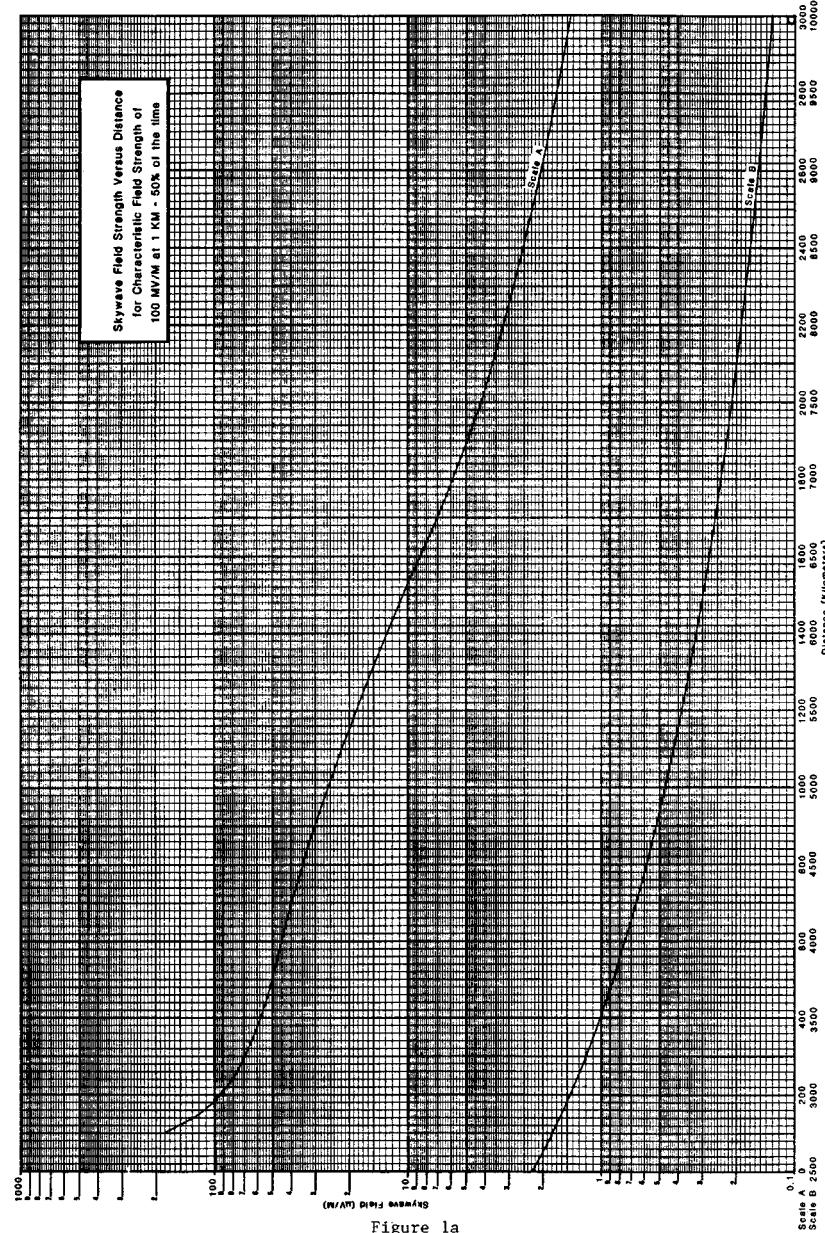
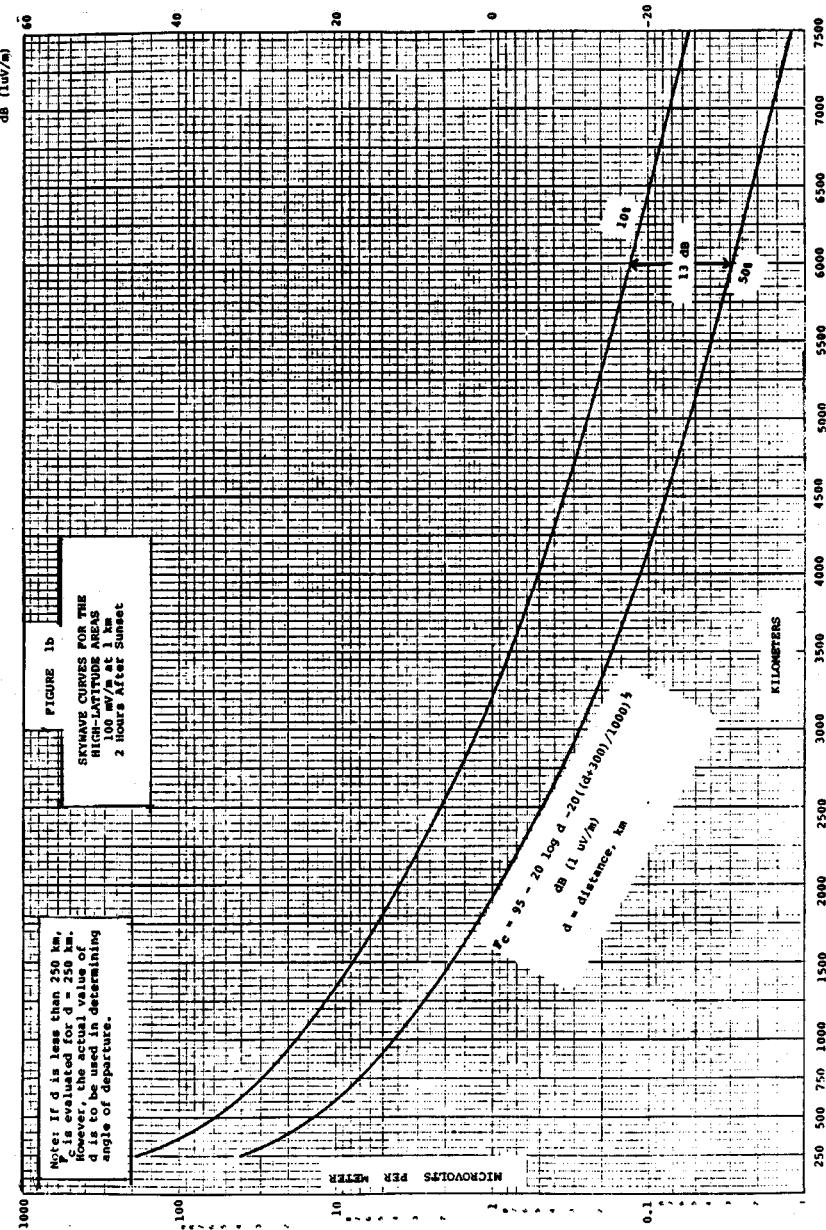
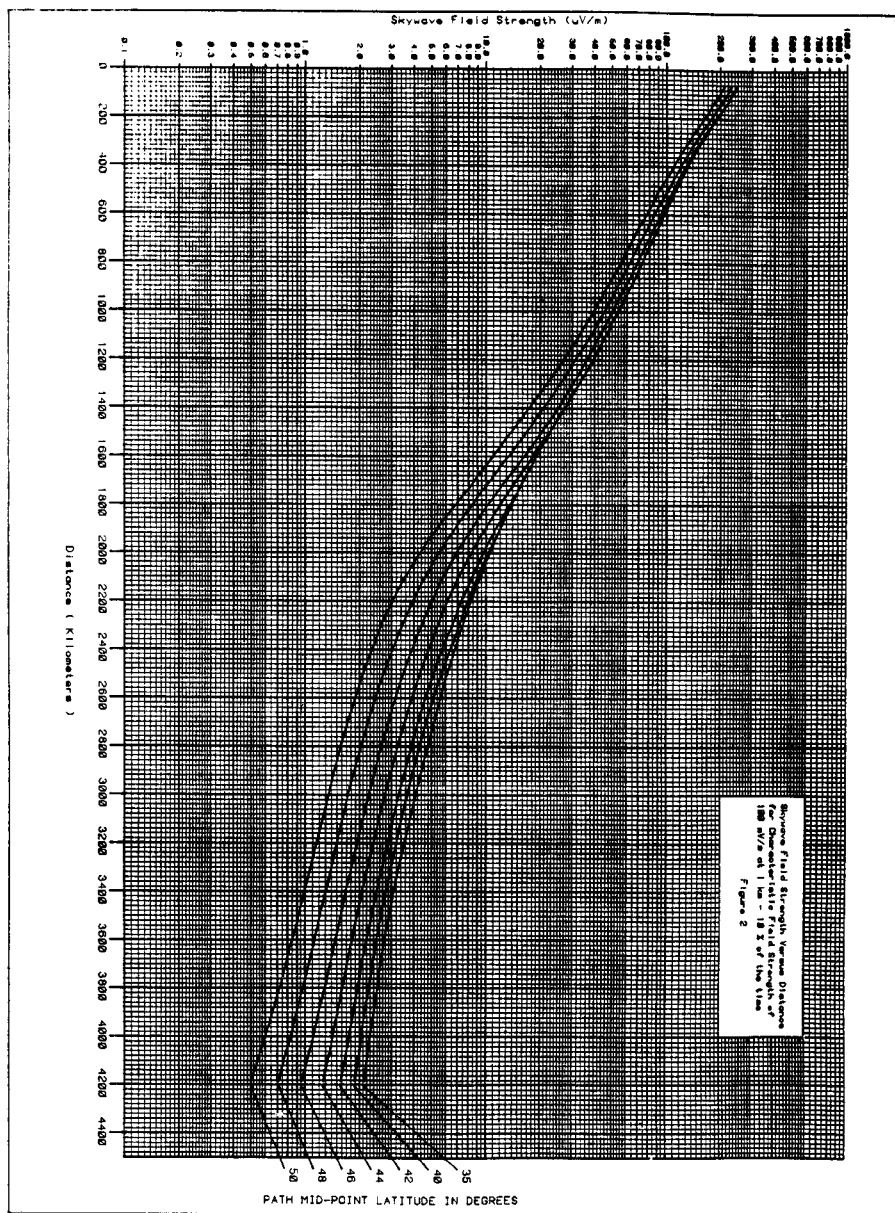


Figure 1a





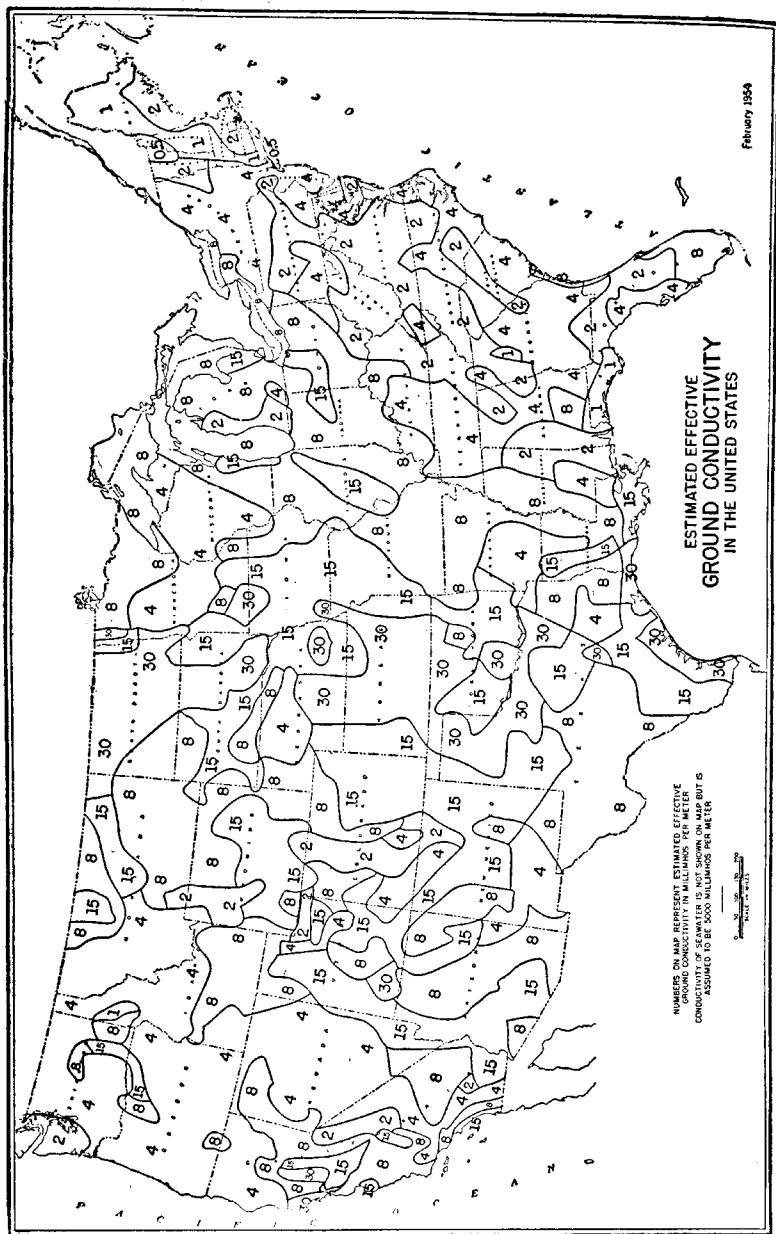


FIGURE R3.

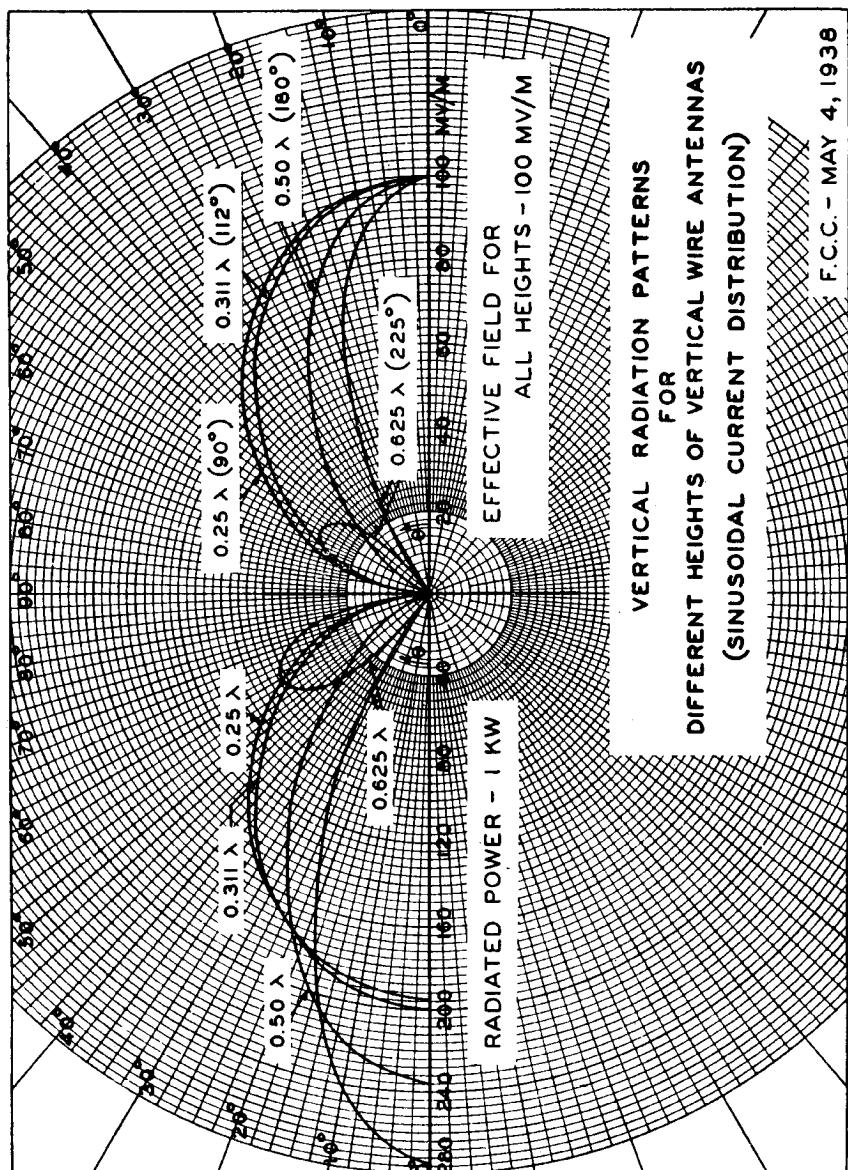
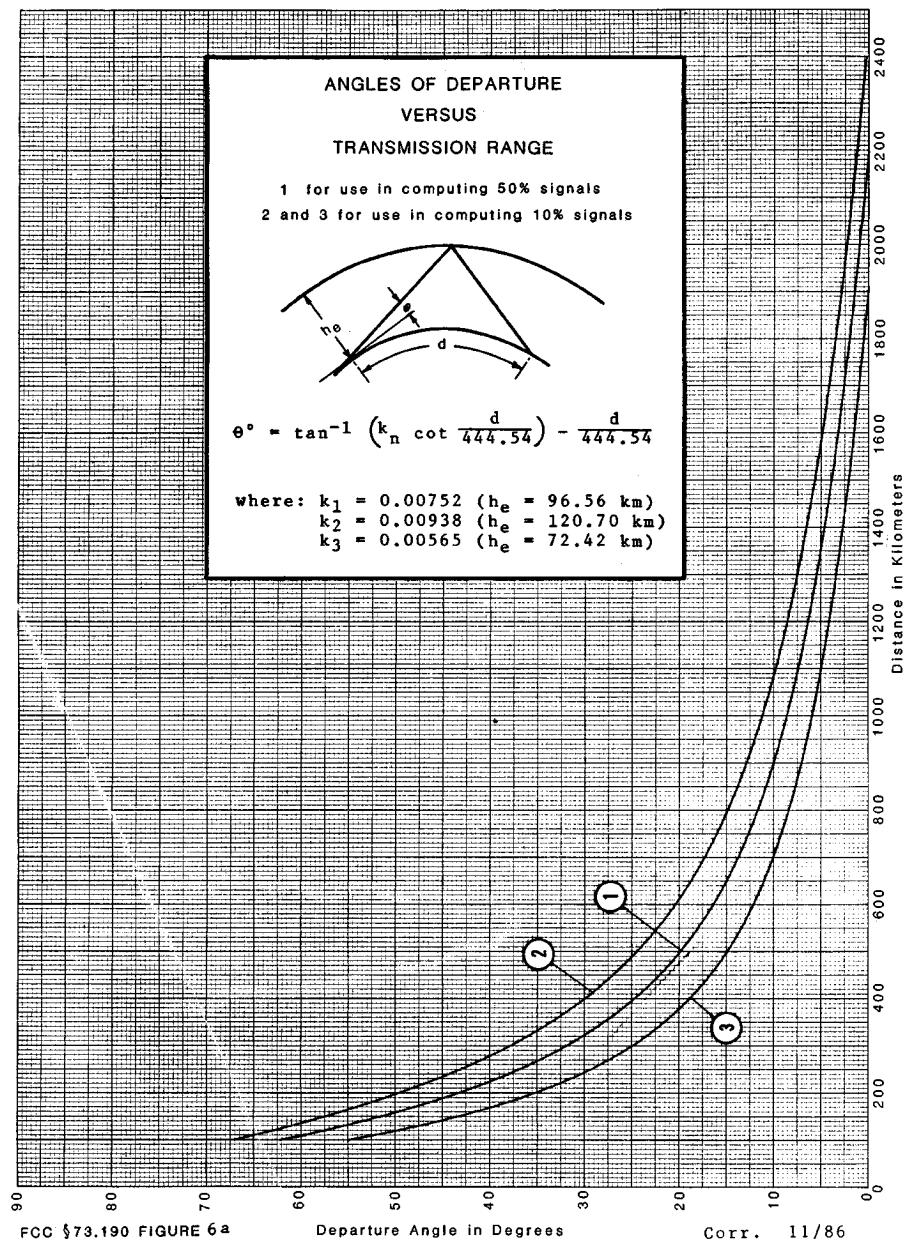


Figure 5



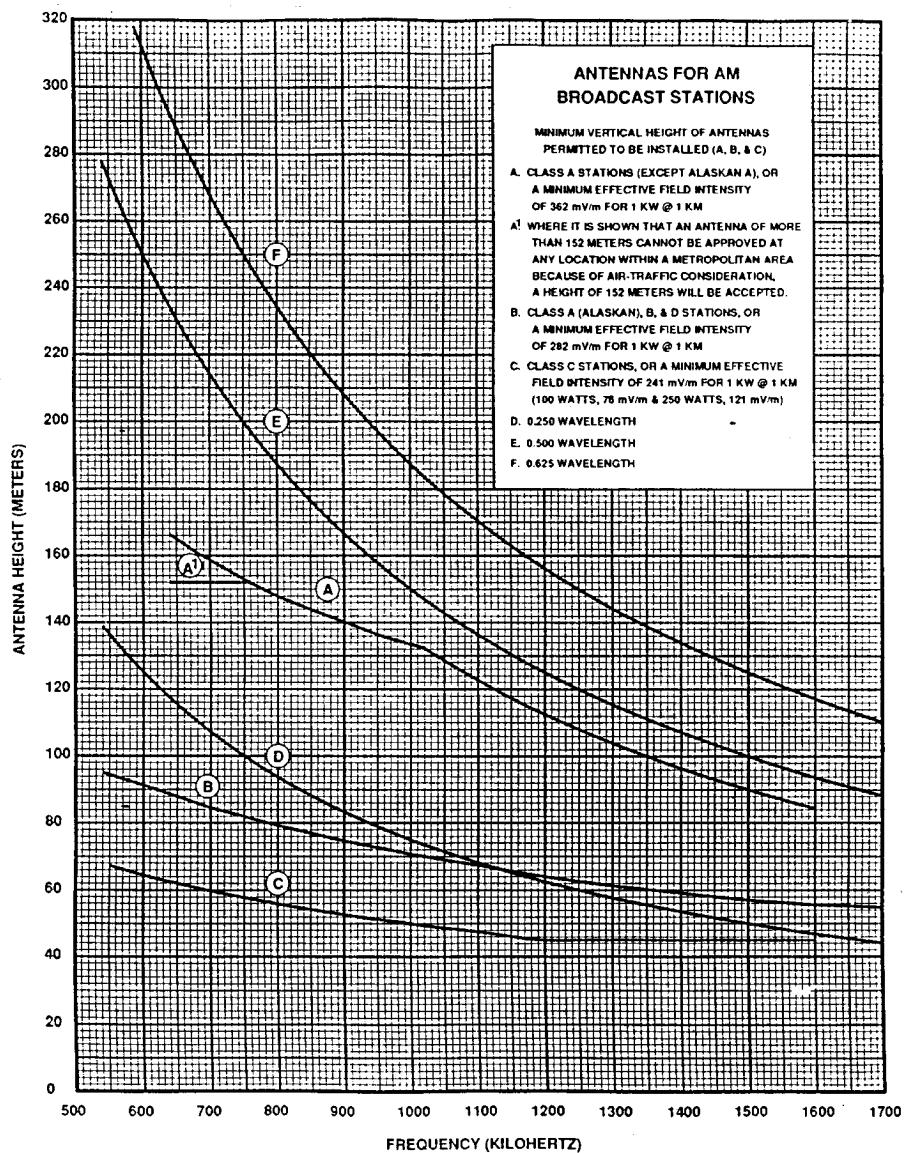


Figure 7

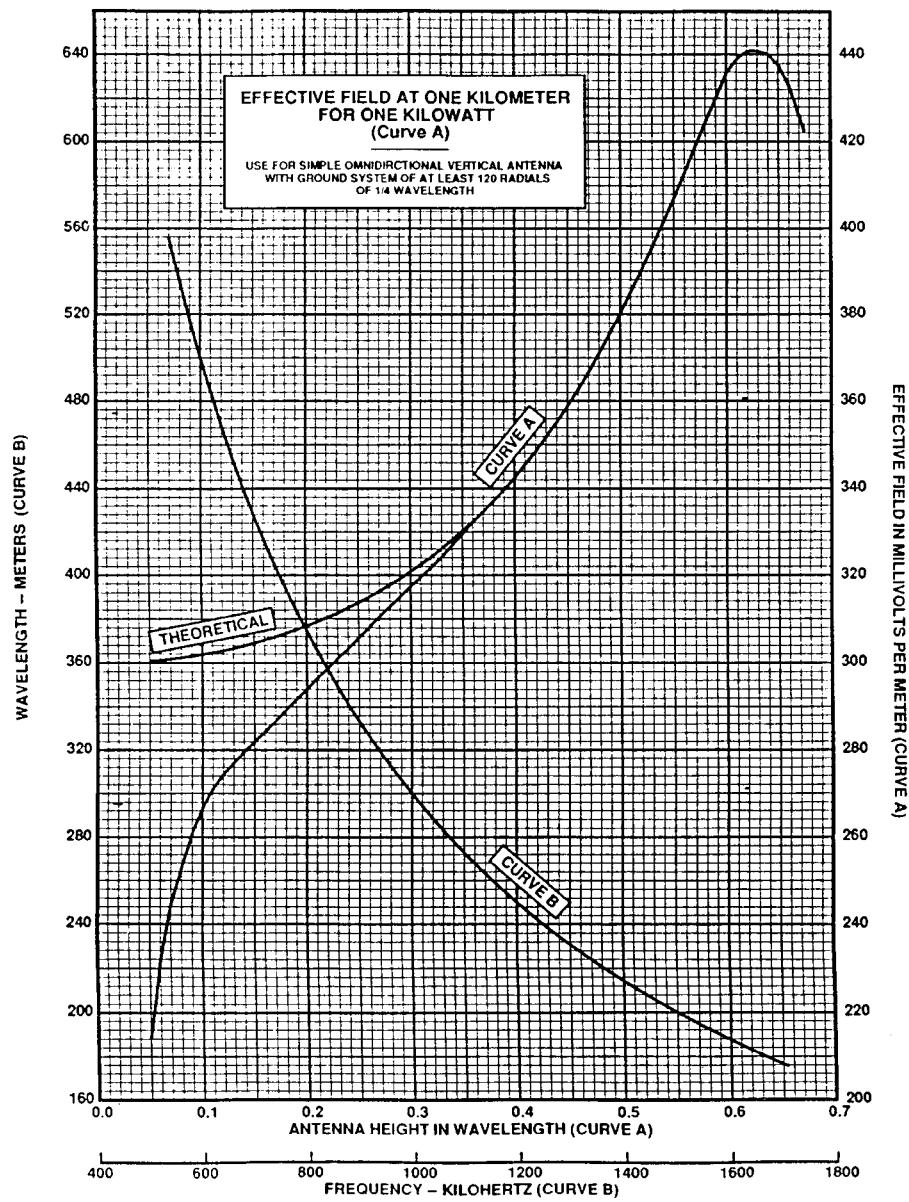


Figure 8

**PERMISSIBLE DAYTIME RADIATION  
FOR CLASS II STATIONS**

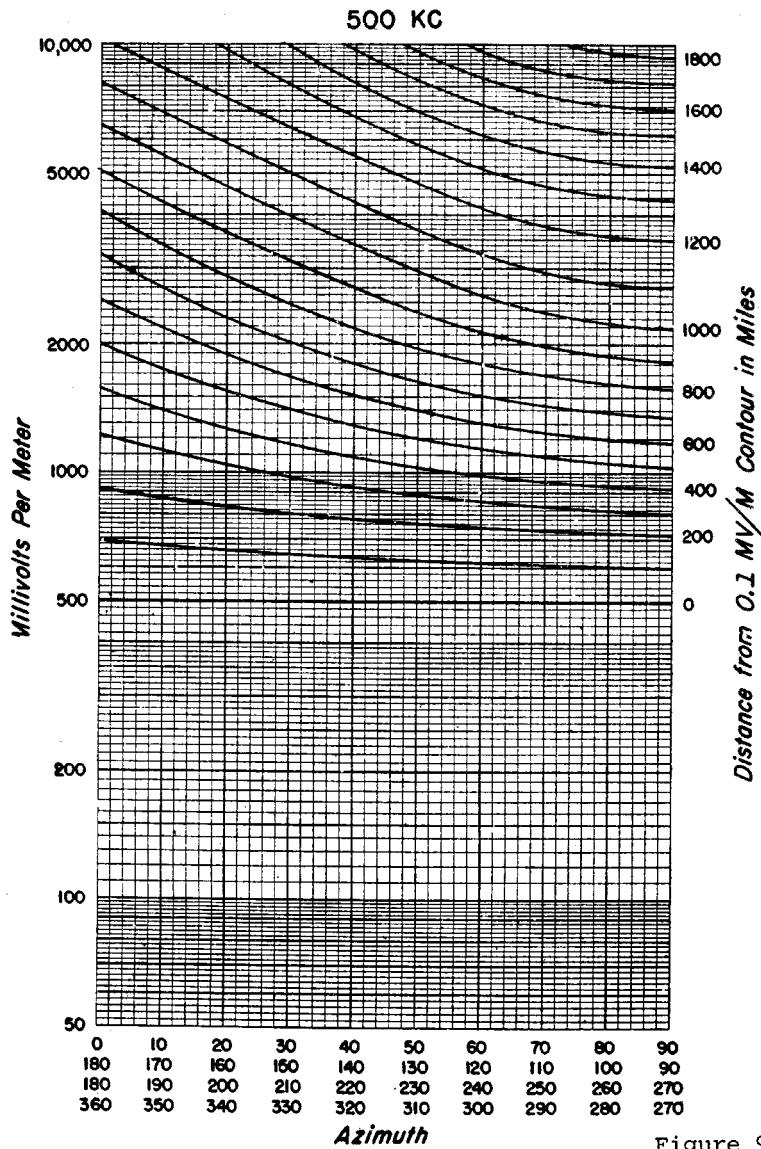


Figure 9

**PERMISSIBLE DAYTIME RADIATION  
FOR CLASS II STATIONS**

1000 KC

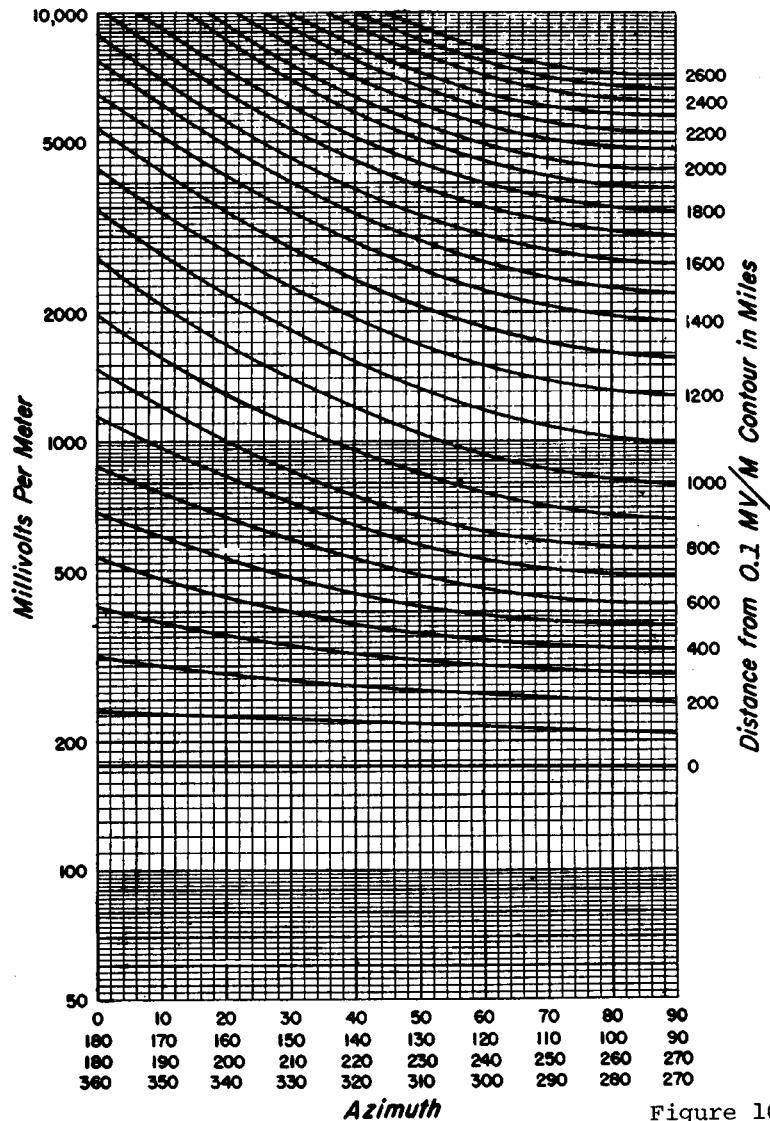


Figure 10

## PERMISSIBLE DAYTIME RADIATION FOR CLASS II STATIONS



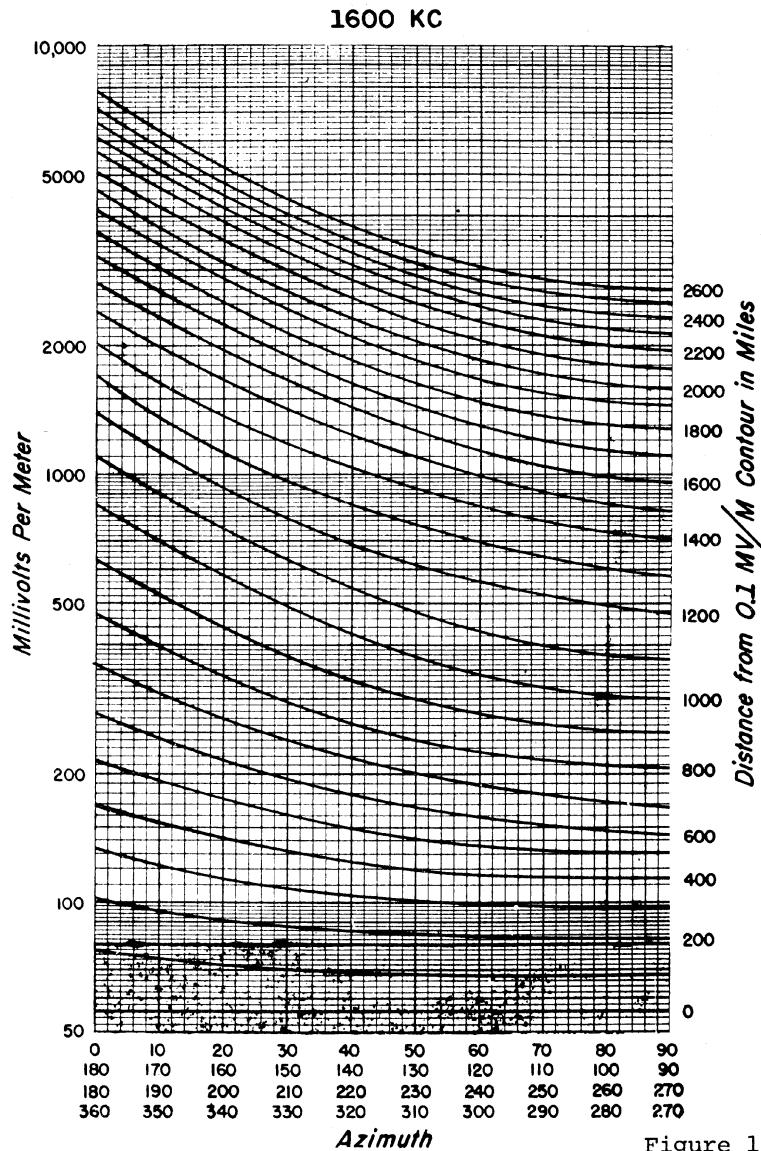


Figure 11

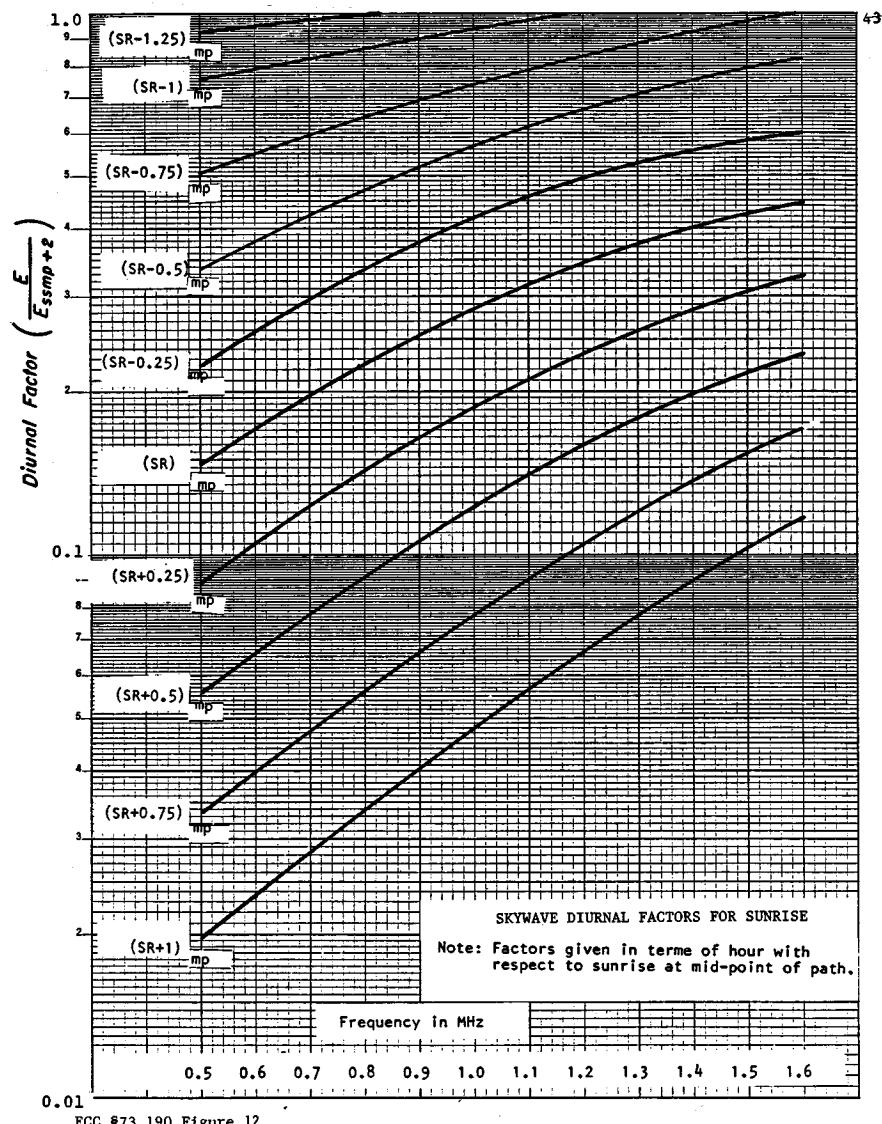

FCC 873.190 Figure 12

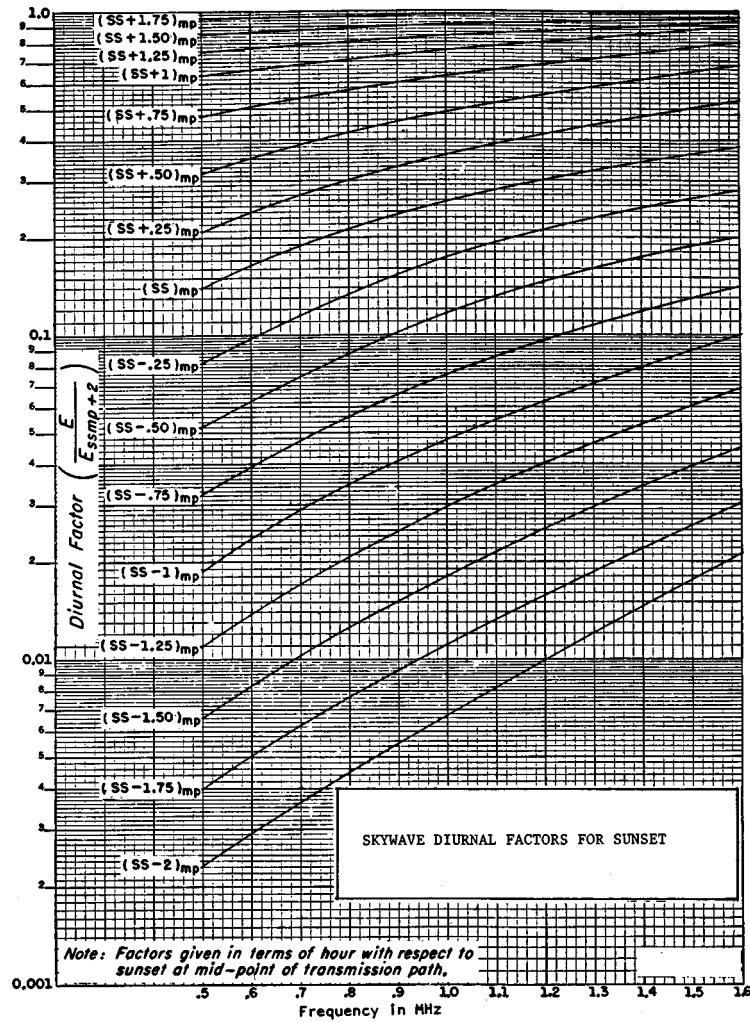

FCC §73.190 Figure 13

[28 FR 13574, Dec. 14, 1963, as amended at 30 FR 12720, Oct. 6, 1965; 33 FR 15420, Oct 17, 1968; 48 FR 42959, Sept. 20, 1983; 49 FR 43963, Nov. 1, 1984; 50 FR 18844, May 2, 1985; 51 FR 4753, Feb. 7, 1986; 52 FR 36879, Oct. 1, 1987; 56 FR 64869, Dec. 12, 1991]